

Case/carton closers

CS-500-TF | Case/carton closer

Standard technical specifications

Speed: Up to 30 CPM

Closure: Three flap glue closer

Concept: Size changeable

Case size: Max W350mm x H200mm x L400mm

Infeed height: 800mm ± 50mm

Outfeed height: 800mm ± 50mm

Sample power consumption: 12Kw, 18A/Ph, 400V, 3 Phase, N&E

Air supply: Up to 4 litres / cycle @ 6 bar

Net weight: 750Kg

Glue: Hot melt glue closure

Specific components: Rockwell Controls


Mainframe: Powder coated mild steel

Board specification

Case/carton styles: Loraparound type with three flaps

Materials: B flute, C flute, E flute


Typical FEFCO styles: 0406, 0410

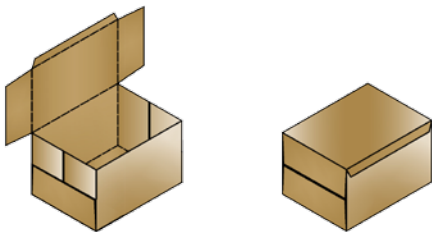

Options

FEFCO board style variants

Oversized and undersized case variants

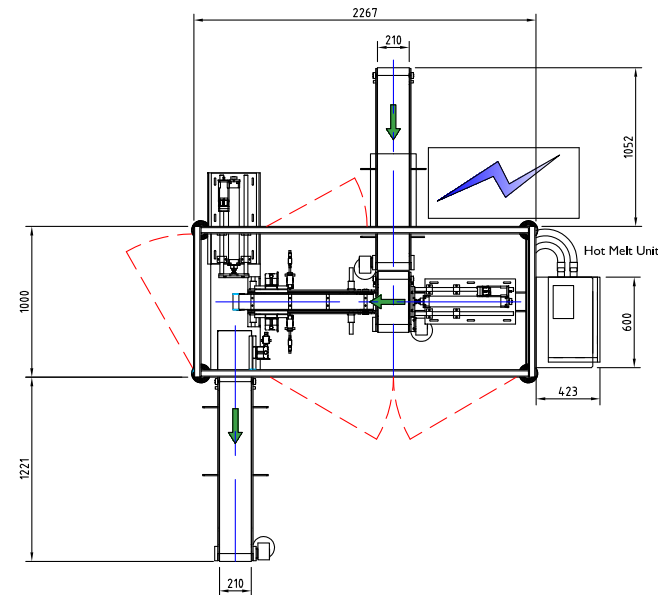

For more information, contact: WestRock Automated Packaging Systems
Phone: +44.0.1502.713777 • E-mail: aps.uk@westrock.com • www.linkxpackaging.com