

Carton collators/loaders

RCL120RCTL | Robot carton collator/loader

Standard technical specifications

Speed: Up to 200 CPM*

Concept: Multiple sizes

Robot: KUKA robot to suit application

Operating height: 900mm nominal

Sample power consumption: 11.5Kw, 24.5A/Ph, 440V, 3 Phase, N&E

Air supply: Dependant on pickhead type

Net weight: Dependant on robot type

Specific components: Rockwell Controls, SMC Pneumatics

Colour: RAL 7035 grey (except for robot)

*Speed dependant on product and product format

Pack type

Cases or Trays

Options

Inline and right angle discharge


Changepart or adjustable pick head

On demand multiple size tray loading

Conveyors

Shrink wrapping

Automatic or robotic case/carton loading and closing

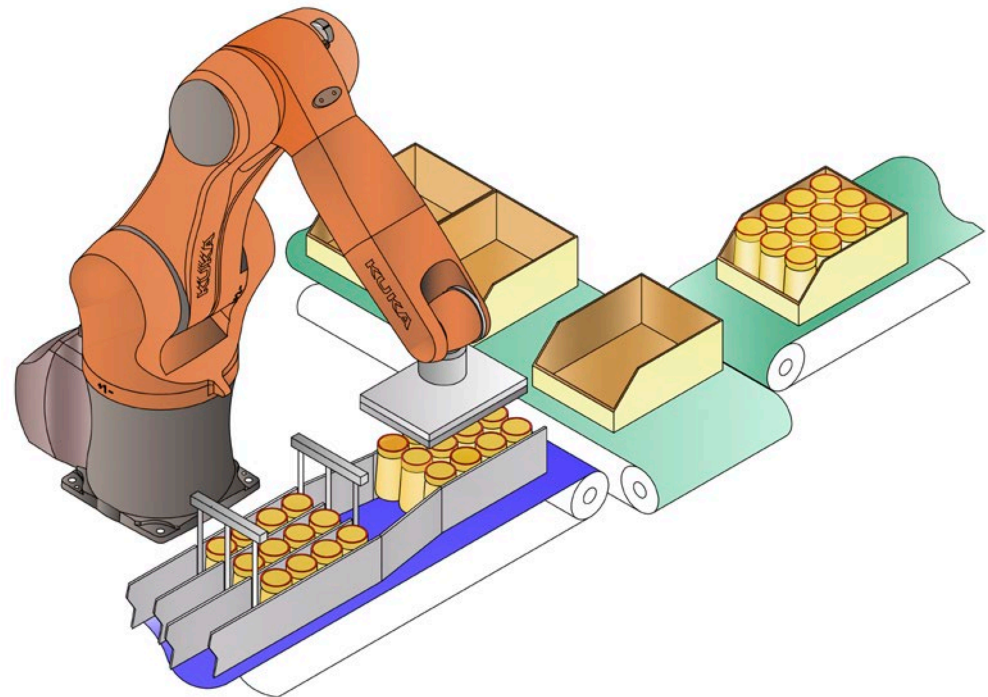

For more information, contact: WestRock Automated Packaging Systems
Phone: +44.0.1502.713777 • E-mail: aps.uk@westrock.com • www.linkxpackaging.com